



INDUSTRIAL AUTOMATION

MiBRX (Micro Modular PLC)
Modular & Fixed I/O PLC
HMI
Power Supply
VFD (AC Drive)

PROCESS MEASUREMENT & CONTROL

PID Controller
Temperature Controller
Humidity Controller
Cooling Controller
Process Indicator
Digital Timer & Counter

Precision Series

selec[®]

PID Controller



Adaptive Tuning

Profile Control

Heat-Cool mode

0.1% of Accuracy for Control & Indication

Response Time ≤ 40 ms

Process Indicator



Precision Process Indicator

0.1% of Accuracy!

Response Time ≤ 40 ms

www.selec.com

PROCESS CONTROLLER SERIES



UNIVERSAL PID CONTROLLER

- Adaptive tune, Short Depth
- Universal Input
- Universal Output
- RS485 Communication
- Up to 128 steps Profile Control

Certifications: , IP65

Product Code	Description	HSN Code	Unit MRP
UNIVERSAL PID CONTROLLERS			
PID500-U-0-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, 90 to 270V AC/DC supply voltage, 48 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM	90328990	5588
PID500-U-0-1-CU	4-Digit (White+Green) Dual display, Capacitive touch Keypad with Universal input, Universal output, 90 to 270V AC/DC supply voltage, Ramp-soak Function, IDM. CE,UL certified.		8382
PID500-U-C-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, RS485 MODBUS communication, 90 to 270V AC/DC supply voltage, 48 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM		6312
PID500-U-C-1-CU	4-Digit (White+Green) Dual display, Capacitive touch Keypad with Universal input, Universal output, RS485 MODBUS communication, 90 to 270V AC/DC supply voltage, Ramp-soak Function, IDM. CE,UL certified.		9468
PID500-U-0-24V	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, 12 to 24V DC supply voltage, 48 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM		5935
PID500-U-C-24V	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, RS485 MODBUS communication, 12 to 24V DC supply voltage, 48 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM		6508
PID110-U-0-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, 96 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM, 24V DC Sensor Supply, 90 to 270V AC/ DC Supply		6036
PID110-U-C-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, RS485 MODBUS communication, 96 x 48mm size, 128 Step Ramp-soak Function Profile control, IDM, 24V DC Sensor Supply, 90 to 270V AC/ DC Supply		6643
PID330-U-0-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, 96 x 96mm size, 128 Step Ramp-soak Function Profile control, IDM, 24V DC Sensor Supply, 90 to 270V AC/ DC Supply		6322
PID330-U-C-1	4-Digit (White+Green) Dual display, Capacitive touch keypad with Universal input, Universal output, RS485 MODBUS communication, 96 x 96mm size, 128 Step Ramp-soak Function Profile control, IDM, 24V DC Sensor Supply, 90 to 270V AC/ DC supply voltage.		7071



PRECISION SERIES

- 0.1% Accuracy
- Universal input, Retransmission analog output
- ≤40msec response time
- 24V inbuilt sensor supply
- 2/4 Digital inputs, IDM applicable

Certifications: , IP65

Product Code	Description	HSN Code	Unit MRP
PRECISION PROCESS INDICATOR / CONTROLLER			
PIC153-P-C-1	5-Digit single white display, 0.1% Accuracy, Capacitive touch keypad with Universal input, Retransmission output, 48 x 96mm size, 24V DC Sensor Supply, RS485 MODBUS communication, 90 to 270V AC/ DC Supply	90303390	11000
PID535-P-C-1	4-Digit (White+Orange) Dual display, 0.1% Measure & Control Accuracy, Capacitive touch keypad with Universal input, Universal output, 48 x 48mm size, Profile control, 24V DC Sensor Supply, RS485 MODBUS communication IDM, 90 to 270V AC/ DC Supply	90328990	12100



PID CONTROLLER

- 4-Digit dual LED display
- Relay / SSR / Analog output
- Universal input
- RS485 MODBUS RTU communication protocol
- Max. 3 setpoints
- One step Ramp-Soak function
- Retransmission output
- Different Standard sizes

Product Code	Description	HSN Code	Unit MRP
PID CONTROLLERS			
PID500-0-0-01	4-Digit dual (Red+Green) display PID controller with Universal Input and 3 relay outputs, 48 x 48mm size, 90 to 270V AC / DC	90328990	4601
PID500-0-0-04	4-Digit dual (Red+Green) display PID controller with Universal Input and 3 relay outputs + RS485 communication, 48 x 48mm size, 90 to 270V AC / DC		6154
PID500-2-0-01	4-Digit dual (Red+Green) display PID controller with Universal Input and 4-20mA analog output + 2 relay outputs, 48 x 48mm size, 90 to 270V AC / DC		5506
PID500-2-0-04	4-Digit dual (Red+Green) display PID controller with Universal Input and 4-20mA analog output + 2 relay outputs + RS485 communication, 48 x 48mm size, 90 to 270V AC / DC		7302
PID330-0-0-01	4-Digit dual (Red+Green) display PID controller with Universal Input and 3 relay outputs, 96 x 96mm size, 90 to 270V AC / DC		5344
PID330-2-0-01	4-Digit (Red+Green) dual display PID controller with Universal Input and 4-20mA analog output + 2 relay outputs, 96 x 96mm size, 90 to 270V AC / DC		6222
PID330-2-0-04	4-Digit dual (Red+Green) display PID controller with Universal Input and 4-20mA analog output + 2 relay outputs + RS485 communication, 96 x 96mm size, 90 to 270V AC / DC		6638
PID528-1	4-Digit dual (Red+Green) display PID controller with 2 relay outputs, 48 x 48mm size, 90 to 270V AC / DC		5572



TEMPERATURE CONTROLLER - CX SERIES

- TC/RTD inputs
- Relay/SSR outputs
- Optional alarm output
- Universal Supply voltage
- Bright Single/ Dual display
- IDM

Certifications: CE RoHS compliant

Product Code	Description	HSN Code	Unit MRP
TEMPERATURE CONTROLLERS - CX SERIES			
TC544C	4-Digit dual bright (White+Green) display, Dual set point, Short depth temperature-controller with Relay / SSR & Relay output, 48 x 48mm size, 90 to 270V AC / DC	90328990	3086
TC544C-CU	4-Digit dual bright (White+Green)display, Dual set point, Short depth temperature controller with Relay / SSR & Relay output, 48X48 mm Size, 90 to 270V AC / DC. CE,UL certified.		4629
TC544C-24V	4-Digit dual bright (White+Green) display, Dual set point, Short depth temperature-controller with Relay / SSR & Relay output, 48 x 48mm size, 12 to 24V DC		3770
TC544C-2-CU	4-Digit dual bright (White+Green)display, Dual set point, Short depth temperature controller with Relay / SSR & Relay output, 48X48 mm Size, 12 to 24V DC. CE,UL certified		5554
TC513CX	3-Digit single White display, Single set point, Temperature controller with Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC		2239
TC244CX	4-Digit dual (White+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, IDM applicable, 72 x 72mm size, 90 to 270V AC / DC		3705
TC344CX	4-Digit dual (White+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, IDM applicable, 96 x 96mm size, 90 to 270V AC / DC		3892
TC203CX	3-Digit single White display, Single set point, Temperature controller with Relay / SSR output, IDM applicable, 72 x 72mm size, 90 to 270V AC / DC		2805
TC303CX	3-Digit single White display, Single set point, Temperature controller with Relay / SSR output, IDM applicable, 96 x 96mm size, 90 to 270V AC / DC		2805
TC293-CT	3 Digits (White+Green+Red) LED display, Temperature controller with TC sensor and Single phase current input, with 1 control relay + SSR, 1 alarm relay output and 2 alarm relay outputs, 72 x 72mm size, 90 to 270V AC/DC, 0-60A, CE certified		3030

Process Controller

SELEC[®]

Temperature Controller



- Dual / Single Set Point
- Relay / SSR Output
- Dwell Timer

Process Indicator



- Scalable analog input
- Voltage / Current input type

Humidity + Temperature



Chiller



- RH + RTD Input
- 4/2 Relay Outputs
- Dual Channel

www.selec.com



TEMPERATURE CONTROLLER

- TC/RTD inputs
- Relay/SSR outputs
- Optional alarm output
- Universal Supply voltage
- Bright Single/ Dual display
- Different standard sizes

Product Code	Description	HSN Code	Unit MRP
TEMPERATURE CONTROLLERS			
TC544B	4-Digit dual (Red+Green) display, Dual set point, Short depth temperature controller with Relay / SSR & Relay output, 48 x 48mm size, 90 to 270V AC / DC	90328990	3027
TC533BX	3-Digit dual (Red+Green) display, Single set point, Short depth temperature-controller with Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC		2646
TC513BX	3-Digit single Red display, Single set point, Short depth temperature controller with Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC		2240
TC544A	4-Digit dual (Red+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, 48 x 48mm size, 90 to 270V AC / DC		3605
TC244AX	4-Digit dual (Red+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, 72 x 72mm size, 90 to 270V AC / DC		3705
TC344AX	4-Digit dual (Red+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, 96 x 96mm size, 90 to 270V AC / DC		3892
TC513AX	3-Digit single Red display, Single set point, Temperature controller with Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC		2606
TC203AX	3-Digit single Red display, Single set point, Temperature controller with Relay / SSR output, 72 x 72mm size, 90 to 270V AC / DC		2805
TC303A	3-Digit single Red display, Single set point, Temperature controller with Relay output, 96 x 96mm size, 90 to 270V AC / DC		2431
TC303AX	3-Digit single Red display, Single set point, Temperature controller with Relay with NC contact / SSR output, 96 x 96mm size, 90 to 270V AC / DC		2805
TC533AX	3-Digit dual (Red+Green) display, Single set point, Temperature controller with Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC		3014
IDM	Independent Downloader Module		1690



STANDARD FUNCTION PRODUCTS

- RTD (PT100) input
- ON - OFF / PID with auto tuning
- High accuracy load sensing
- RS485 Communication

Product Code	Description	HSN Code	Unit MRP
LC02-72-7-LC02-RO03-AO01-230V	2 Channel loadcell controller with Retransmission	90318000	15910
TC02-2M-7-RTDA02-RO04-24VDC	2 Channel Temperature controller	90258090	8071
TC08-96-8-RTDA08-RO08-230V	8 Channel Temperature scanner cum controller		19533



PROCESS INDICATOR

- 4-Digit LED single display
- Universal / Voltage-Current / TC-RTD input
- Optional Retransmission analog Output
- Inbuilt 24V DC Sensor supply
- Alarm output (Optional)
- RS485 MODBUS RTU communication protocol (Optional)

Product Code	Description	HSN Code	Unit MRP
PROCESS INDICATORS			
PIC152A-VI	4 Digit red LED display Process indicator with universal input & retransmission output, 2x5A alarm relay output, 24V DC Sensor Supply, 48 x 96mm, 90 to 270V AC / DC Supply	90303390	5789
PIC152A-VI-24V	4 Digit red LED display Process indicator with universal input & retransmission output, 2x5A alarm relay output, 24V DC Sensor Supply, 48 x 96mm, 24V DC Supply		7321
PIC101-N	4 Digit red LED display Process indicator with universal input & inbuilt 24V DC sensor supply, 48 x 96mm, 90 to 270V AC / DC Supply		3111
PIC101-N-24	4 Digit red LED display Process indicator with universal input & inbuilt 24V DC sensor supply, 48 x 96mm, 24V DC Supply		4351
PIC101A-T-230	4 Digit red LED display Process indicator with TC & RTD input, 48 x 96mm, 230V AC Supply		2186
PIC101A-VI-230	4 Digit red LED display Process indicator with Voltage & Current input, 48 x 96mm, 230V AC Supply		1915
PIC501A-VI-230	4 Digit red LED display Process indicator with Voltage & Current input, 48 x 48mm, 230V AC Supply		2038
PIC101B-VI	4 Digit single white display, process indicator with Voltage & Current input, 48 x 96mm, 90 to 270V AC / DC Supply, CE Certified		1915
PIC101B-VI-24V	4 Digit single white display, process indicator with Voltage & Current input, 48 x 96mm, 24V DC Supply		2316



HUMIDITY & TEMPERATURE CONTROLLER

- RH sensor input (Humidity)
- PT100 sensor (Temperature)
- ON-OFF control (Humidity)
- ON-OFF/ PID control (Temperature)
- 90 to 270 V AC / DC supply
- RH sensor enclosed with the unit

Certifications:  

Product Code	Description	HSN Code	Unit MRP
HUMIDITY CONTROLLERS			
HC404	3 Digit white LED display Humidity controller with RH sensor input and Relay control output, Alarm relay output, 36 x 72mm size, 90 to 270V AC / DC, CE Certified	90328910	4596
HC205	4 Digit (White+Green) LED dual display Humidity controller with RH sensor input and Relay control output, Alarm relay output, 72 x 72mm size, 90 to 270V AC / DC, CE Certified		5101
HUMIDITY+TEMPERATURE CONTROLLERS			
HTC405	3 Digit white LED display Humidity+Temperature controller with RH sensor and PT100 input and 2 X Relay control output, 36 x 72mm size, 90 to 270V AC / DC, CE Certified	90328910	4756
HTC206	4 Digit (White+Green) LED display Humidity+Temperature controller with RH sensor & PT100 input and 2 X Relay control output, 72 x 72mm size, 90 o 270V AC / DC, CE Certified		5297
HTC307	4 Digit (White+Green) LED display Humidity + Temperature controller with RH sensor and PT100 input, with 2 control relay output & 2 alarm relay output, RS485 Modbus Communication, 96 x 96mm size, 90 to 270 VAC / DC,CE Certified		8692
HS-A-100	Humidity probe sensor [Supply:- 5V DC, Output:- 0.5 to 4.5V DC]		1636



TC - ECONOMICAL SERIES

- Bright Single/ Dual Display
- Relay/SSR Output
- Single / Dual set point
- Optional alarm output
- Universal power supply

Product Code	Description	HSN Code	Unit MRP
TEMPERATURE CONTROLLERS			
DTC503-TC	3-Digit single red display, Low cost temperature controller with J, K input, Relay / SSR output, 48 x 48mm size, 90 to 270V AC / DC Supply.	90328990	1737
DTC231-TC	3-Digit single red display, Low cost temperature controller with J, K input, Relay / SSR output, 72 x 72mm size, 90 to 270V AC / DC Supply.		1795
DTC331-TC	3-Digit single red display, Low cost temperature controller with J, K input, Relay / SSR output, 96 x 96mm size, 90 to 270V AC / DC Supply.		1795
DTC524	4-Digit dual bright (Red+Green)display, Dual set point, Short depth temperature controller with Relay / SSR & Relay output, 48X48 mm Size, 90 to 270V AC / DC Supply		2518
DTC224	4-Digit dual (Red+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, 72X72 mm size, 90 to 270V AC / DC Supply		2605
DTC324	4-Digit dual (Red+Green) display, Dual set point, Temperature controller with Relay / SSR & Relay output, 96X96 mm size, 90 to 270V AC / DC Supply		2605



COOLING CONTROLLER

- Single LED Display
- Relay control output
- NTC input
- ON-OFF control
- compact size
- Auxiliary Relay/SSR output
- DI, Defrost management available

Product Code	Description	HSN Code	Unit MRP
COOLING CONTROLLERS			
CH403B-1-NTC	2 ½ Digits White display cooling controller with NTC input and 10A Relay output, 36 x 72mm size, 230V AC supply voltage	90328990	1442
CH403B-2-NTC	2 ½ Digits white display cooling controller with NTC input and 20A (LUG type) Relay output, 36 x 72mm size, 230V AC supply voltage		1629
CH403B-3-NTC	2 ½ Digits white display cooling controller with NTC input and 20A SPST Relay output + 5A auxiliary relay output with cyclic timer, 36 x 72mm size, 230V AC supply voltage		2131
CH403C-1-NTC V2	3-Digits White display cooling controller with NTC input and 10A Relay output, 12V SSR auxiliary Output, DI, 36 x 72mm size, 230V AC supply voltage, CE Certified		1943
CH403C-2-NTC	3-Digits White display cooling controller with NTC input and 20A (LUG type) Relay output, DI, 36 x 72mm size, 230V AC supply voltage, CE Certified		2193
CH403C-3-NTC	3-Digits White display cooling controller with NTC input, 10A SPDT Relay output, 5A SPST auxiliary Output with cyclic timer, DI, 36 x 72mm size, 230V AC supply voltage, CE Certified		2193
CH403C-4-NTC	3-Digits white display dual channel cooling controller with 2 xNTC input and 3 relay output, DI, 36 x 72mm size, 85 to 270V AC supply voltage, CE Certified		2316

Timer + Counter Series **selec**[®]



Timer + Counter

- ▶ Time / Count / Rate / Batch / RPM
- ▶ 15 kHz Input Speed
- ▶ 2 Relay Output

Digital Timer



- ▶ On Delay / Interval / Cyclic ON-OFF

Time + Count Totaliser

Rate + Count



Totaliser



Counter



Timer



LED Display

Battery Powered

www.selec.com

DIGITAL TIMERS



A SERIES TIMER

- Thumbwheel setting
- Single set point
- Universal power supply
- Gate / Pulse start selectable
- Short depth

Certifications:  

Product Code	Description	HSN Code	Unit MRP
MULTIFUNCTION TIMERS			
XT56A	3 Digit Single white display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point, 48 x 48mm, 90 to 270V AC/ DC supply, CE Certified	85364900	3126
XT264A	3 Digit Single white display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point, 72 x 72mm, 90 to 270V AC/ DC supply, CE Certified		2957
XT364A	3 Digit Single white display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point, 96 x 96mm, 90 to 270V AC/ DC Supply, CE Certified		3331
XT546A	3 Digit (White+Green) dual display, Multi function timer with Multiple time range, 2 C/O SPDT relay output, UP / Down counting, single set point, 48 x 48mm, 90 to 270V AC / DC Supply, CE Certified		2914
XT246A	3 Digit (White+Green) dual display, Multi function timer with Multiple time range, 2 C/O SPDT relay output, UP / Down counting, single set point, 72 x 72mm, 90 to 270V AC/ DC Supply, CE Certified		2914
XT346A	3 Digit (White+Green) dual LED display Multi function timer, Multiple time range, 2 C/O SPDT relay output, Down counting, single set point, 96 x 96mm, 90 to 270V AC/ DC Supply, CE Certified		3071
XT543A	3 Digit Single white display, Multiple function and time ranges, 2 C/O SPDT relay output, Single set point, single set point, 48 x 48mm, 90 to 270V AC/ DC Supply, CE Certified		2616



MULTIFUNCTION TIMER

- Thumbwheel setting
- Single & Dual set points
- Multi-range
- Universal power supply
- Gate / Pulse start selectable

Product Code	Description	HSN Code	Unit MRP
MULTIFUNCTION TIMERS			
XT56-N	3 Digit Single red display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point 48 x 48mm, 90 to 270V AC/DC supply	85364900	3126
XT264-3	3 Digit Single red display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point, 72 x 72mm, 90 to 270V AC/DC supply		3105
XT364-3	3 Digit Single red display Thumb-wheel timer, On delay/ Interval mode, Multiple time range, 2 C/O SPDT relay output, single set point, 96 x 96mm, 90 to 270V AC/DC supply		3331
XT546	3 Digit dual (Red + Green) display Multi function timer, Multiple time range, 2 C/O SPDT relay output, Down counting, single set point, 48 x 48mm, 90 to 270V AC/DC supply		3040
XT246	3 Digit dual (Red + Green) display Multi function timer, Multiple time range, 2 C/O SPDT relay output, Down counting, single set point, 72 x 72mm, 90 to 270V AC/DC supply		2914
XT346	3 Digit dual (Red + Green) display Multi function timer, Multiple time range, 2 C/O SPDT relay output, Down counting, single set point, 96 x 96mm, 90 to 270V AC/DC supply		3071
XT546BX	3 Digit dual (Red + Green) display Multi function timer, Multiple time range, 2 C/O SPDT relay output, Up-Down counting, single set point, 48 x 48mm, Short depth, 90 to 270V AC/DC supply		2914
XT543-N	3 Digit Single red display Thumb-wheel timer, Multiple function and time ranges, 2 C/O SPDT relay output, single set point, 48 x 48mm, 90 to 270V AC/DC supply		2616
XT5042	4 Digit dual (Red + Green) display Multi function multi range timer, Dual set point, 2 C/O SPST relay output, single set point, 48 x 48mm, 90 to 270V AC/DC Supply		5634

Price list 2026 (w.e.f. April 6th, 2026)



SEQUENTIAL TIMER

- Series / Parallel timer
- 8 outputs with 4 functions available
- Cascade output for expansion
- Universal power supply

Product Code	Description	HSN Code	Unit MRP
SEQUENTIAL TIMER			
PT380	2 + 4 Digit LED display multi functional sequential timer with 8 Channel output, multiple time ranges, 96 x 96mm, 90 to 270V AC/DC supply	85364900	9980



TIME INTERVAL METERS

- Hour meters
- Auto ranging
- Selectable least count
- Universal power supply / Battery powered

Product Code	Description	HSN Code	Unit MRP
TIME INTERVAL METERS			
TT412B	6 Digit LED Time interval with multiple time ranges, 36 x 72mm, 90 to 270V AC/DC	91069000	3192
LT945A-V-CE	7+1/2 Digit LCD display Hour meter, battery powered, Voltage input, remote reset, 24 x 48mm, CE Certified		1496
LTC9A	7+1/2 Digit LCD display Time/ Count totalizer, battery powered, Voltage/Contact input, front/remote reset, 24 x 48mm, CE Certified		1290



TOTALISERS

- Count totaliser
- Selectable voltage/ contact input
- Battery powered/ Universal power supply
- Inbuilt sensor supply

Product Code	Description	HSN Code	Unit MRP
TOTALISERS			
XC10D	6 Digit LED Display Counter with 3 Hz/30Hz/1KHz input speed, 48 x 96mm, 90 to 270V AC/DC supply	90314900	3149
XC410B	6 Digit LED Display Counter with 20Hz/5 KHz input speed, 36 x 72mm, 90 to 270V AC/DC supply		2365
XC10	6 Digit White LED Display Counter with 3 Hz/5kHz input speed, with rate, count selectable through DIP switch, 48 x 96mm, 90 to 270 VAC/DC Supply, CE Certified	90291090	3149
XC410C	6 Digit White LED Display Count totaliser with 20Hz/5KHz input speed, 36 x 72mm, 90 to 270 VAC/ DC Supply, CE Certified		2365



PROGRAMMABLE/ PRESET COUNTER

- Thumbwheel setting
- Auto reset & Memory retention functions
- Dual setpoint, Batch counting
- Rate indicators
- Programmable input scaling

Product Code	Description	HSN Code	Unit MRP
PROGRAMMABLE / PRESET COUNTERS			
XTC562	6 Digit dual(White+Orange) display, user configurable Timer/ Counter / Rate/ Batch counter, Dual Set Point, Inbuilt Sensor Supply, 48 x 48mm size, 90 to 270V AC/ DC Supply, CE Certified	90291090	4492
XTC262	6 Digit dual(White+Orange) display, user configurable Timer/ Counter / Rate/ Batch counter, Dual Set Point, Inbuilt Sensor Supply, 72 x 72mm size, 90 to 270V AC/ DC Supply, CE Certified		4492
XC1200	6 Digit LED display programmable counter with rate indicator, multi directional counting, 2 C/O SPDT relay output, 48 x 96mm, 90 to 270V AC/DC supply		7480
XC22B	4 Digit LED display Thumb-Wheel Counter with selectable auto reset and memory retention, 2 SPDT relay output, 72 x 72mm, 90 to 270V AC/DC supply		3805
XC2200	6+4 Digit LED display programmable counter with rate indicator and batch counter, multi directional, 2 C/O SPDT relay output, 72 x 72mm, 90-270V AC/DC		4096
XTC5400	4 Digit dual display Multifunctional and Multirange Timer+counter, 2 C/O SPDT relay output, memory retention, 48 x 48mm, 90 to 270V AC/DC	85364900	5634
XTC4102-CU	6 Digit white LED display Time + Count Totalizer, 36 x 72mm, Contact/voltage input, 90 to 270V AC/DC supply, UL Certified		3186
XTC4102-2-CU	6 Digit white LED display Time + Count Totalizer, 36 x 72mm, Contact/voltage input, 12 to 24V DC supply, UL Certified		3823




SOLID STATE RELAY

- Control input voltage: 4 to 32V DC
- Load output voltage: 24 to 330V AC / 48 to 480V AC
- Max. load current: 25/ 40A variants
- Output device: TRIAC , SCR's

Product Code	Description	HSN Code	Unit MRP
SOLID STATE RELAYS			
RDA25	Solid state relay with 4-32V DC control input and 24-480V AC output, 25A maximum load current	85364900	447
RDA40	Solid state relay with 4-32V DC control input and 24-480V AC output, 40A maximum load current		510
RDA50	Solid state relay with 4-32V DC control input and 24-480V AC output, 50A maximum load current		879
RAA25	Solid state relay with 90-280V AC control input and 24-480V AC output, 25A maximum load current		456
RAA40	Solid state relay with 90-280V AC control input and 24-480V AC output, 40A maximum load current		535

OTHER ACCESSORIES

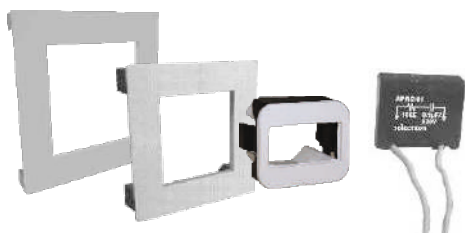

Product Code	Description	HSN Code	Unit MRP
OTHER ACCESSORIES			
TSP04	NTC Probe Sensor	90259000	666
ADAPTER PLATES 72 X 48 (FG)	Adapter plate 72 x 48mm	39269099	267
ADAPTER PLATES 96 X 48 (FG)	Adapter plate 96 x 48mm		267
ADAPTER PLATES 96 X 72 (FG)	Adapter plate 96 x 72mm		267
ADAPTER PLATES 48 X 24 (FG)	Adapter plate 48 x 24mm		174
SNUBBER-1	Snubber Circuit	85363000	246