


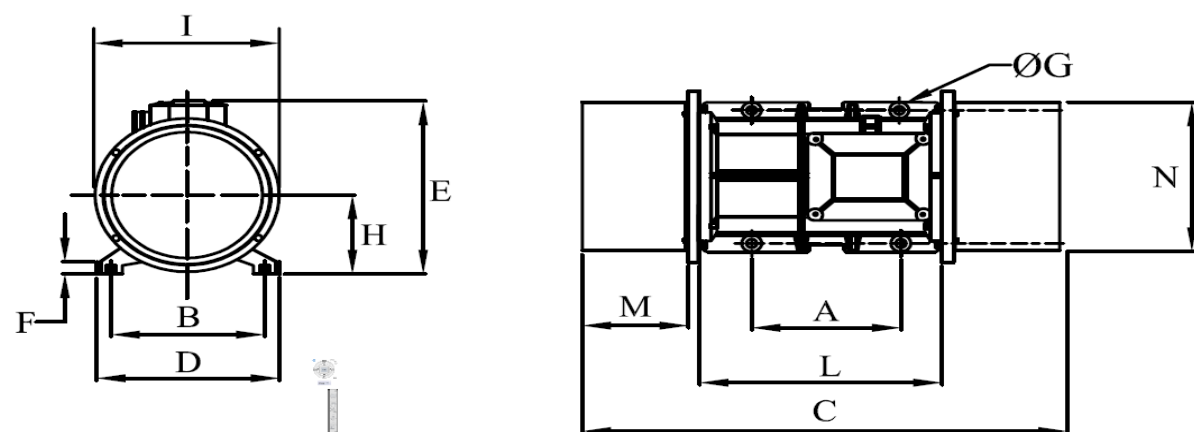

Drawing A

Drawing B

Electrical Vibrator Motor / 3ø / B3

Dimensional Chart

S.No	Model	KW / HP	RPM	Pattern / Drawing	C	M	A	B	ØG	Holes	D	E	F	H	I	L	N
1	FVM 18/30	0.18 / 0.25	3000	A	302	90	90	100	10	4	132	155	16	67	116	122	116
2	FVM 35/30	0.18 / 0.25	3000	A	302	90	90	100	10	4	132	155	16	67	115	122	118
3	FVM 40/30	0.37 / 0.5	3000	A	324.4	90	90	140	12	4	180	200	30	85	130	142	140
4	FVM 42/30	0.37 / 0.5	3000	A	324.4	90	90	140	12	4	180	200	30	85	130	142	140
5	FVM 76/30	0.75 / 1	3000	A	348	125	120	170	17	4	220	210	32	95	180	180	182
6	FVM 112/30	1.5 / 2	3000	A	394	160	140	190	17	4	247	275	37	135	258	234	258
7	FVM 255/30	2.2 / 3	3000	A	502.2	135	140	190	17	4	250	275	36	135	265	234	228
8	FVM 382/30	3.7 / 5	3000	B	602	153	155	255	24	4	302	310	35	160	300	294	268
11	FVM 18/15	0.18 / 0.25	1500	A	302	85	90	100	10	4	132	155	16	67	116	122	116
12	FVM 28/15	0.18 / 0.25	1500	A	302	90	90	100	10	4	132	155	16	67	116	122	116
13	FVM 42/15	0.37 / 0.5	1500	A	324.4	90	90	140	12	4	180	200	30	85	130	142	140
14	FVM 56/15	0.37 / 0.5	1500	A	324.4	90	90	140	12	4	180	200	30	85	130	142	140
15	FVM 96/15	0.75 / 1	1500	A	395.7	125	120	170	17	4	220	210	32	95	180	180	182
16	FVM 130/15	0.75 / 1	1500	A	467.3	160	140	190	17	4	247	275	37	135	258	234	258
17	FVM 276/15	1.1 / 1.5	1500	B	502.2	135	140	190	17	4	250	275	36	135	265	234	228
18	FVM 191/15	1.5 / 2	1500	B	521.3	160	140	190	17	4	247	275	37	135	258	234	258
19	FVM 321/15	1.5 / 2	1500	B	502.2	135	140	190	17	4	247	275	36	135	265	234	228
20	FVM 380/15	2.2 / 3	1500	B	602	153	155	255	24	4	302	310	35	160	300	294	268
21	FVM 540/15	3.7 / 5	1500	B	754	235	180	280	26	4	340	325	30	185	310	284	270
22	FVM 725/15	5.5 / 7.5	1500	B	805.5	148	200	320	28	6	390	410	40	220	425	350	350
23	FVM 880/15	7.5 / 10	1500	B	805.5	148	200	320	28	6	390	410	40	220	425	350	350
24	FVM 50/10	0.37 / 0.5	1000	A	395.7	125	120	170	17	4	220	210	32	95	180	180	182
25	FVM 116/10	0.75 / 1	1000	B	502.2	135	140	190	17	4	247	275	36	135	265	234	228
26	FVM 143/10	0.75 / 1	1000	B	502.2	135	140	190	17	4	247	275	36	135	265	234	228
27	FVM 180/10	0.75 / 1	1000	B	502.2	135	140	190	17	4	247	275	36	135	265	234	228
28	FVM 240/10	1.5 / 2	1000	B	602	153	155	255	24	4	302	310	35	160	300	294	268
29	FVM 306/10	2.2 / 3	1000	B	754	235	155	255	26	4	340	325	30	185	310	284	270
30	FVM 506/10	3.7 / 5	1000	B	805.5	183	200	320	28	6	390	410	40	220	425	350	350
31	FVM 636/10	5.5 / 7.5	1000	B	805.5	183	200	320	28	6	390	410	40	220	425	350	350
32	FVM 874/10C	7.5 / 10	1000	B	926	238	440	280	32	6	530	427	48	258	400	450	375
33	FVM 900/10	7.5 / 10	1000	B	926	238	265	390	28	6	530	427	48	258	400	450	375